




DOCUMENTATION TECHNIQUE

TISSU ETANCHE DOUBLE PEAU ÉPAISSEUR 50MM

double-wall

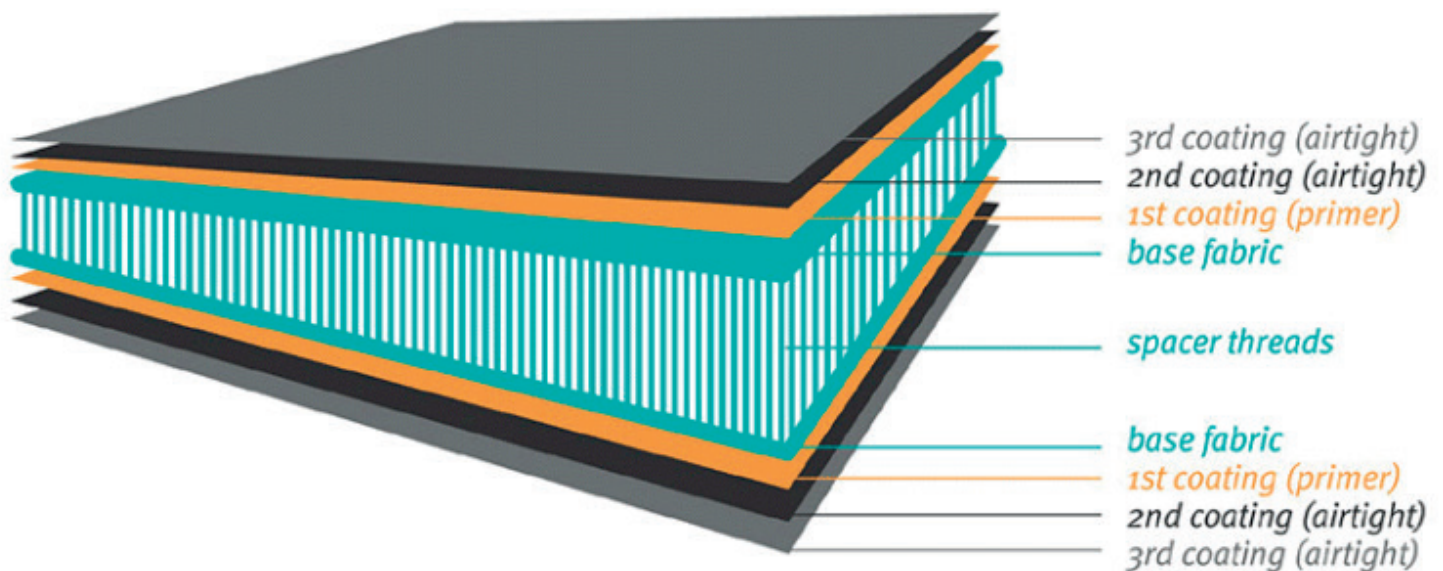

Physical Characters

Properties	Units	Test method	Average value
Base Fabric Yarn	Denier		500 x 500D
Base Fabric Density	Thread/inch	FZ/T01003	22x16
Finished Fabric Weight	Gram/m2	FZ/T01003	2600
Finished Width Available	Up to 2.1m		
Thickness - finished product	mm	GB/T6672-2001	
Tensile strength at MD (front/back)	N/5cm	GB/T1040	1300/1300
Tensile strength at CD (front/back)	N/5cm	GB/T1040	2100/2100
Tearing Strength at MD(front/back)	N/5cm	GB/T16578	700/800
Tearing Strength at CD (front/back)	N/5cm	GB/T16578	1200/1200
Peeling Strength (front/back)	N/5cm	GB/T3917	250/200
Temperature range	℃		-20 ~ +70
PSI			15-20